

SIEMENS

SIMATIC Sensors


SIMATIC MV440

Configuration guide



© Siemens AG 2010. All Rights Reserved.

Configuration guide MV440

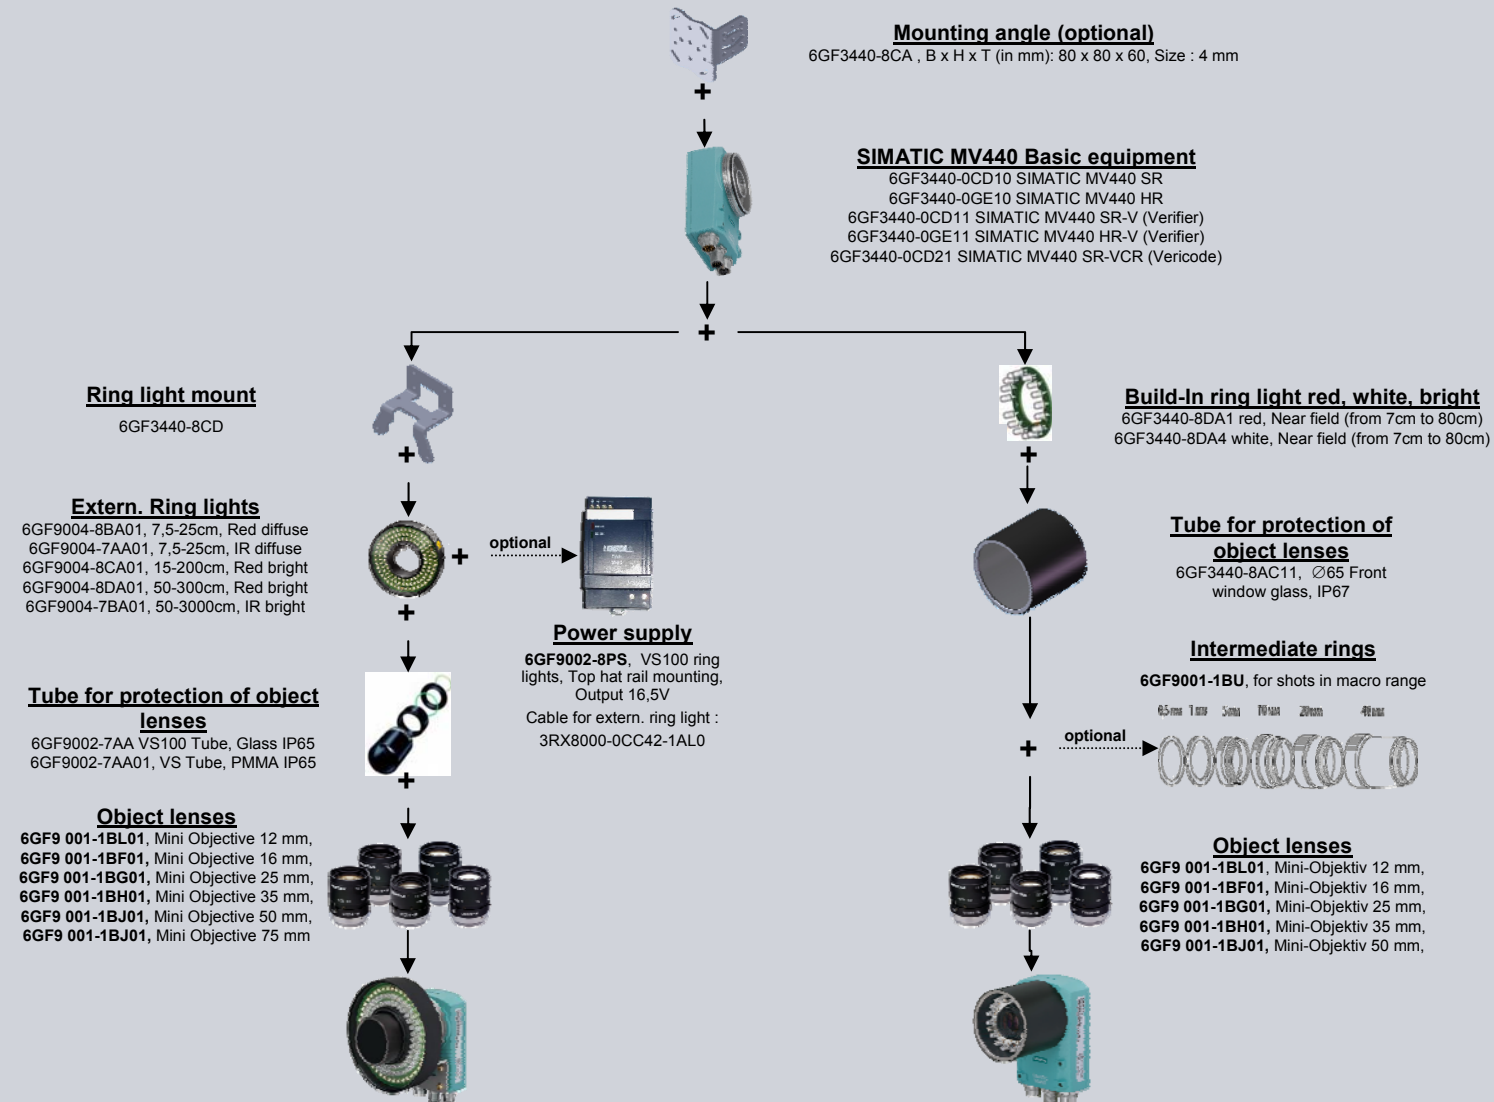

Configuration guide MV440 accessories

Power-DIO-RS232/RS422 -Cable
 6GF3440-8BA2, Length 10 m, 12-Pin M16 plug
 6GF3440-8BA4, Length 30 m, 12-Pin M16 plug

Ethernet-Cable M12/RJ45
 6GF3440-8BB1 Length 2 m, for
 commissioning and service

*** Ethernet-Cable M12/M12-180**

6XV1870-8AE30, Length 0,3 m
 6XV1870-8AE50, Length 0,5 m
 6XV1870-8AH10, Length 1,0 m
 6XV1870-8AH15, Length 1,5 m
 6XV1870-8AH20, Length 2,0 m
 6XV1870-8AH30, Length 3,0 m
 6XV1870-8AH50, Length 5,0 m
 6XV1870-8AN10, Length 10 m
 6XV1870-8AN15, Length 15 m

6GK1901-1BB10-2AA0,
 Connector: IE FC RJ45 plug 180

Connection Cable M12/M12

6GT2891-0FH20 = 2 m
 6GT2891-0FH50 = 5 m
 6GT2891-0FN10 = 10 m
 6GT2891-0FN20 = 20 m
 6GT2891-0FN50 = 50 m
 Max. 2xMV440 pro ASM

RF180C Profinet

(6GT2002-0JD00 +
 6GT2002-1JD00 or
 6GT2002-2JD00)

ASM456 Profibus

(6GT2002-0ED00 +
 6ES7194-3AA00-0AA0 or
 6ES7194-3AA00-0BA0)

*Special cable lengths with 90° and 180° cable tap respectively via: <http://support.automation.siemens.com/ww/view/en/26999294>