
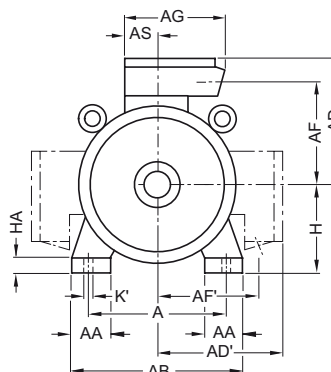




Type of construction IM B3

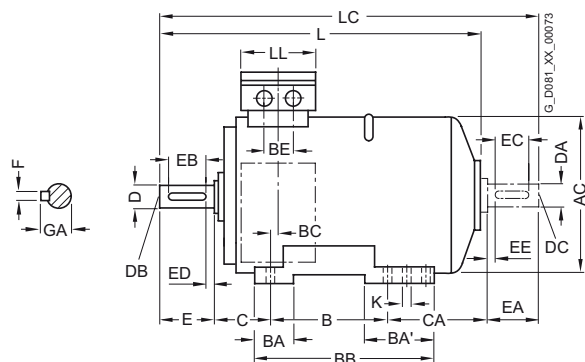

Frame sizes 180 M/L, 225 S/M, 280 S/M/L and 315 S/M/L have frame feet each with 2 drilled holes at NDE.

Types of construction IM B5 and IM V1 (IM B5 only up to frame size 315 M)

For flange dimensions, see "Flange dimensions" (Z = the number of retaining holes)

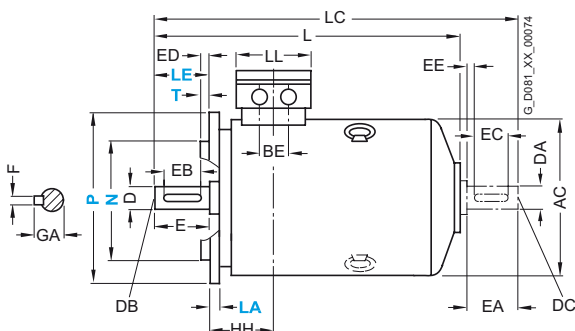

The motors are supplied with two fitted eyebolts conforming to IM B5, whereby one can be repositioned to conform to IM V1 or IM V3. It is important to note that stress must not be applied perpendicular to the ring plane.


For motor			Dimension designation acc. to IEC																							
Frame size	Type	Number of poles	A	AA	AB	AC	AD	AD'	AF	AF'	AG	AH	AS	B*	BA	BA'	BB	BC	BE	C	CA*	H	HA			
180 M 180 L	1PP4 183	2, 4	279	65	339	363	262	262	220	220	152	452	71	241	70	111	328	36	54	121	94	180	20			
	1PP4 186	4, 6, 8	279	65	339	363	262	262	220	220	152	452	71	279	70	111	328	36	54	121	56	180	20			
	1PP4 188	2, 4, 6, 8	279	65	339	363	262	262	220	220	152	452	71	279	70	111	328	36	54	121	107	180	20			
200 L	1PP4 206	2, 6	318	70	378	402	300	300	247	247	260	512	96	305	80	80	355	63	85	133	76	200	25			
	1PP4 207	2, 4, 6, 8	318	70	378	402	300	300	247	247	260	512	96	305	80	80	355	63	85	133	76	200	25			
	1PP4 208	2, 6 4, 8	318	70	378	402	300	300	247	247	260	512	96	305	80	80	355	63	85	133	133 76	200	25			
225 S 225 M	1PP4 220	4, 8	356	80	436	442	325	325	272	272	260	556	96	286	85	110	361	47	85	149	99	225	34			
	1PP4 223	2 4, 6, 8	356	80	436	442	325	325	272	272	260	556	96	311	85	110	361	47	85	149	74	225	34			
	1PP4 228	2 4, 6, 8	356	80	436	442	325	325	272	272	260	556	96	311	85	110	361	47	85	149	134	225	34			
250 M	1PP4 253	2 4, 6, 8	406	100	490	495	392	392	308	308	300	620	118	349	100	100	409	69	110	168	111	250	40			
	1PP4 258	2 4 6, 8	406	100	490	495	392	392	308	308	300	620	118	349	100	100	409	69	110	168	111 181 111	250	40			
280 S	1PP4 280	2 4, 6, 8	457	100	540	555	432	432	348	348	300	672	118	368	100	151	479	62	110	190	137	280	40			
280 M	1PP4 283	2 4, 6, 8	457	100	540	555	432	432	348	348	300	672	118	414	100	151	479	62	110	190	86	280	40			
	1PP4 288	2 4 6, 8	457	100	540	555	432	432	348	348	300	672	118	419	100	151	479	62	110	190	196	280	40			
																					86					
315 S	1PP4 310	2	508	120	610	610	500	500	400	400	380	780	154	406	125	176	527	69	110	216	168	315	50			
315 M ¹⁾	1PP4 310	4, 6, 8																								
	1PP4 313	2	508	120	610	610	500	500	400	400	380	780	154	457	125	176	527	69	110	216	117	315	50			
315 L ¹⁾	1PP4 313	4, 6, 8																								
	1PP4 316/317	2	508	120	610	610	500	500	400	400	380	780	154	508	125	176	578	69	110	216	226	315	50			
	1PP4 316/317	4, 6, 8																								
	1PP4 318	8																								
	1PP4 318	6	508	120	610	610	500	500	400	400	380	780	154	508	155	206	648	69	110	216	366	315	50			

* This dimension is assigned in DIN EN 50347 to the frame size listed.

¹⁾ With order codes for connection box positions (K09, K10, K11) only fitted feet with 3 drilled holes with dimension "B" (406, 457 and 506 mm). BB will then be 666 mm.

Type of construction IM B35

For flange dimensions, see "Flange dimensions" (Z = the number of retaining holes)

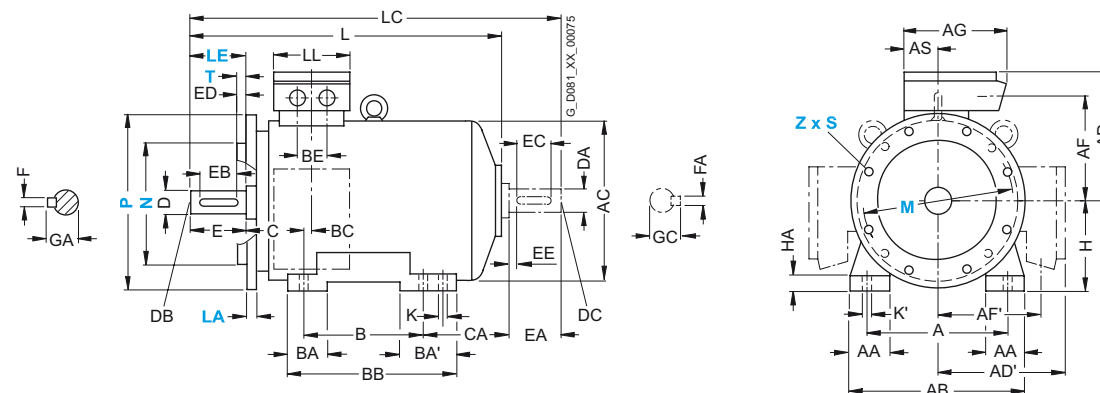

For motor			Dimension designation acc. to IEC						DE shaft extension						NDE shaft extension								
Frame size	Type	Number of poles	HH	K	K'	L	LC	LL	D	DB	E	EB	ED	F	GA	DA	DC	EA	EC	EE	FA	GC	
180 M	1PP4 183	2, 4	157	15	19	562	676	132	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5	
180 L	1PP4 186	4, 6, 8	157	15	19	562	676	132	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5	
	1PP4 188	2, 4, 6, 8	157	15	19	613	727	132	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5	
200 L	1PP4 206	2, 6	196	19	25	617	734	192	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59	
	1PP4 207	2, 4, 6, 8	196	19	25	617	734	192	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59	
	1PP4 208	2, 6	196	19	25	674	791	192	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59	
		4, 8				617	734																
225 S	1PP4 220	4, 8	196	19	25	670	784	192	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59	
225 M	1PP4 223	2	196	19	25	640	754	192	55	M20	110	100	5	16	59	48	M16	110	100	5	14	51.5	
		4, 6, 8				670	784		60	M20	140	125	10	18	64	55	M20	110	100	5	16	59	
	1PP4 228	2	196	19	25	700	814	192	55	M20	110	100	5	16	59	48	M16	110	100	5	14	51.5	
		4, 6, 8				730	844		60	M20	140	125	10	18	64	55	M20	110	100	5	16	59	
250 M	1PP4 253	2	237	24	30	764	878	236	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59	
		4, 6, 8					908		65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
	1PP4 258	2	237	24	30	764	878	236	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59	
		4				834	978		65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
		6, 8				764	908		65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
280 S	1PP4 280	2	252	24	30	830	975	236	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
280 M	1PP4 283	4, 6, 8							75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69	
		2	252	24	30	830	975	236	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
		4, 6, 8							75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69	
		1PP4 288	2	252	24	30	940	1085	236	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
			4							75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69
			6, 8				830	975		75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69
315 S	1PP4 310	2	285	28	35	925	1070	307	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
315 M 1)	1PP4 310	4, 6, 8				955	1100		80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5	
	1PP4 313	2	285	28	35	925	1070	307	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
	1PP4 313	4, 6, 8				955	1100		80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5	
315 L 1)	1PP4 316/317	2	285	28	35	1085	1230	307	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
	1PP4 316/317	4, 6, 8				1115	1260		80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5	
	1PP4 318	8							80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5	
	1PP4 318	6	285	28	35	1255	1400	307	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5	

¹⁾ With order codes for connection box positions (K09, K10, K11) only fitted feet with 3 drilled holes with dimension "B" (406, 457 and 506 mm). BB will then be 666 mm.